



BLU-KD Remote Control



The BLU-KD is a 3-input (3-mic or 2-mic & 1-transformer balanced stereo to mono line input) remote control for **BSS Audio London Series Digital Signal Processors**. It is built on a 19" 2RU steel panel. It is designed to be used with the existing wiring in a cultural hall with a 19" tilt out box on the wall. On the backside of the control, there is a 10-pin euro-style connector for connecting the BLU-KD to the DSP, and a 3-pin Euro-block for the audio signal from either Mic 3 or the Aux Inputs to the DSP.

BLU-KD Wiring Instructions

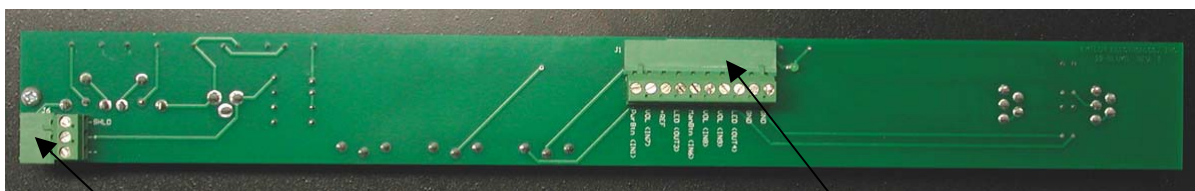

Mic 3/Aux Output Pinouts 3-pin Euro Block

1. -
2. +
3. Shield

10-pin Euro Block

1. Power Button (CCA pin 1)
2. Volume 1 (CCA pin 2)
3. Ref Voltage (CCA pin 3)
4. Pwr Button LED (CCA pin 6)
5. A/M Button (CCB pin 1)
6. Volume 2 (CCB pin 2)
7. Volume 3 (CCB pin 5)
8. A/M Button LED (CCB pin 6)
9. GND (CCA pin 7)
10. GND (CCA pin 8)

There is a green LED located on the backside of the BLU-KD. If you have installed the power correctly on the 10-pin euro-style connector, the green LED will light up.